
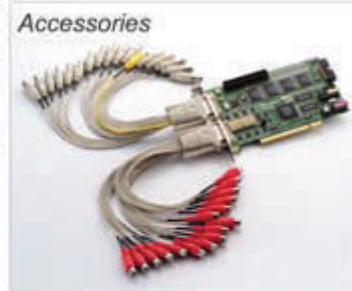



GV-1240 Combo Card

DVI

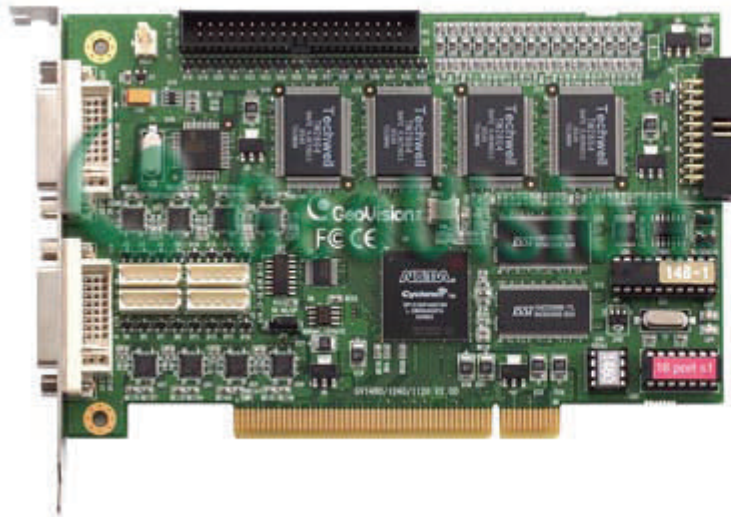


CE FC

D-Type

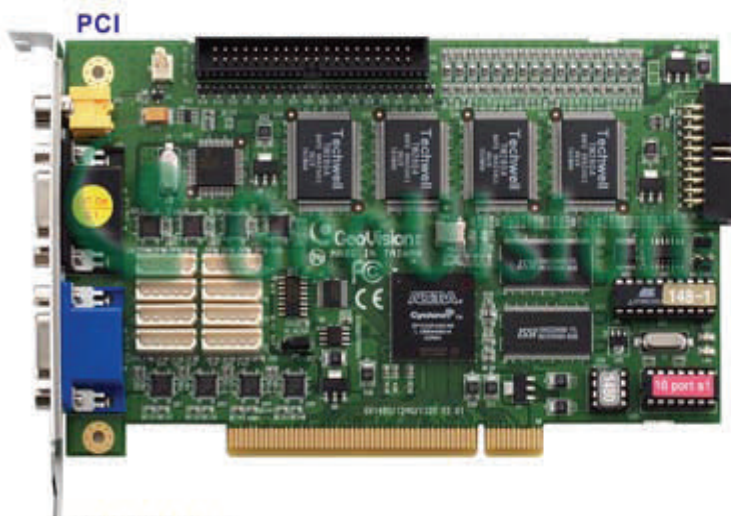

PCI Express

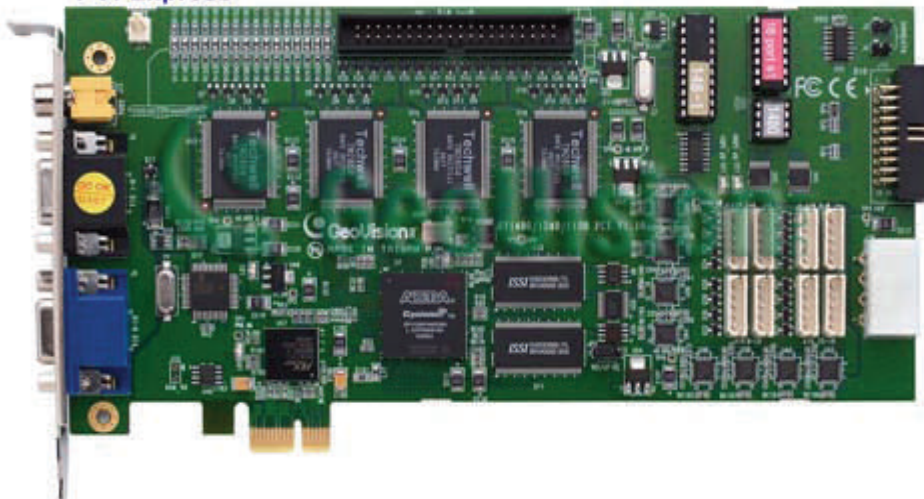

CE FC

Specifications

Input Type	DVI : DVI x 2 (one for 16 video, one for 16 audio)
Video Input(s)	8, 16 Cams
Audio Input(s)	8, 16 Channels
TV Output	RCA Connector x 1
Recording Rate	240 fps (NTSC), 200 fps (PAL)
Display Rate	480 fps (NTSC), 400 fps (PAL)
Video Resolution - NTSC/PAL	Full D1, Half D1, CIF
Compression Format	Geo MPEG4, Geo MPEG4 (ASP), Geo H264, Geo H264 V2
GV-NET Card Support	Yes
GV-NET/IO Card Support	Yes
GV-Hybrid DVR Card Support	Yes
Dimensions	DVI: 165 (W) x 95 (H) mm
Installation Guide	DVI

Note: GV-1240 is currently not compatible with VIA series and ATI series chipset motherboards.

Minimum System Requirements

OS Supported	Windows 2000 / Windows XP / Windows Server 2003 / Windows Vista
CPU	Pentium 4-2.6GHz with Hyper-threading or above
RAM	2 x 512 MB dual channel
HDD	120 GB or above (recommended)
VGA	ATI Radeon 9550 or above NVIDIA 6200 or above
DirectX	9.0 or above