



GV-1480 Combo Card

DVI

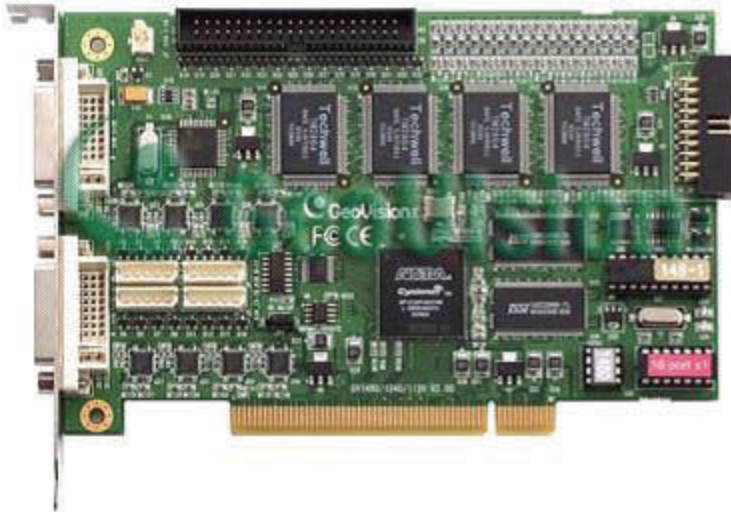


Accessories

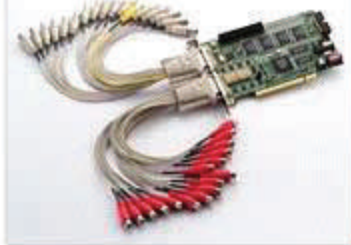

CE FC

D-Type


PCI

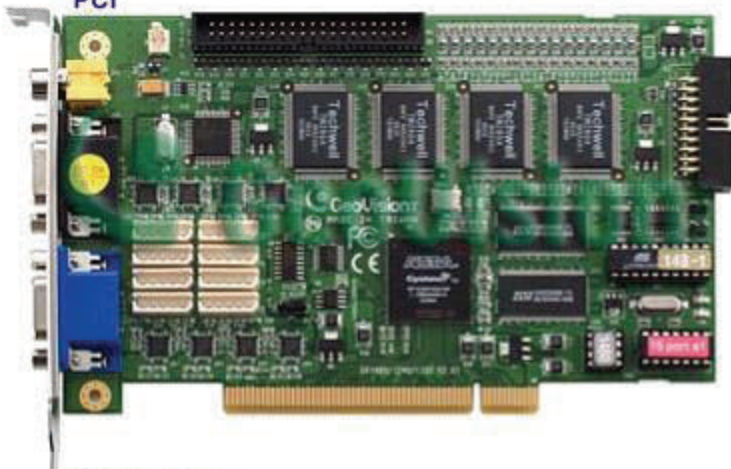

Accessories



PCI Express

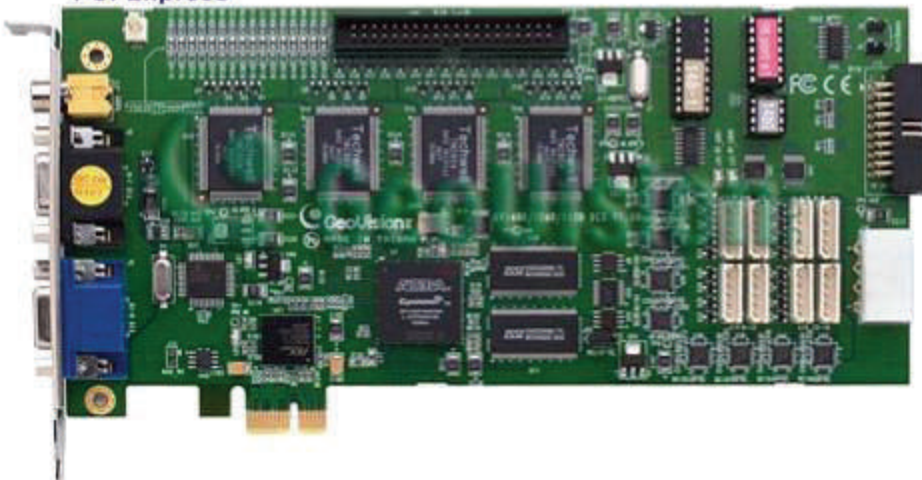

CE FC

Specifications

Input Type	DVI : DVI x 2 (one for 16 video, one for 16 audio) D-Type: DB15 x 2 (for video) ; DB9 x 2 (extension card for audio)
Video Input(s)	16 Cams
Audio Input(s)	16 Channels
TV Output	RCA Connector x 1
Recording Rate At 320 X 240 Resolution	480 fps (NTSC), 400 fps (PAL)
Display Rate	480 fps (NTSC), 400 fps (PAL)
Video Resolution - NTSC/PAL	Full D1, Half D1, CIF
Compression Format	Geo MPEG4, Geo MPEG4 (ASP), Geo H264, Geo H264 V2
GV-NET Card Support	Yes
GV-NET/IO Card Support	Yes
GV-Hybrid DVR Card Support	Yes
Dimensions	DVI: 165 (W) x 95 (H) mm D-Type: 170 (W) x 95 (H) mm D-Type PCI Express: 212 (W) x 99 (H) mm
Installation Guide	DVI D-Type PCI Express

Note: GV-1480 is currently not compatible with VIA series and ATI series chipset motherboards.

Minimum System Requirements

OS Supported	Windows 2000 / Windows XP / Windows Server 2003 / Windows Vista
CPU	Pentium 4-3.0GHz with Hyper-threading or above
RAM	2 x 512 MB dual channel
HDD	250 GB or above (recommended)
VGA	ATI Radeon 9550 or above NVIDIA 6200 or above
DirectX	9.0 or above